







SAJ Smart PV&ESS Solution for C&I Scenarios



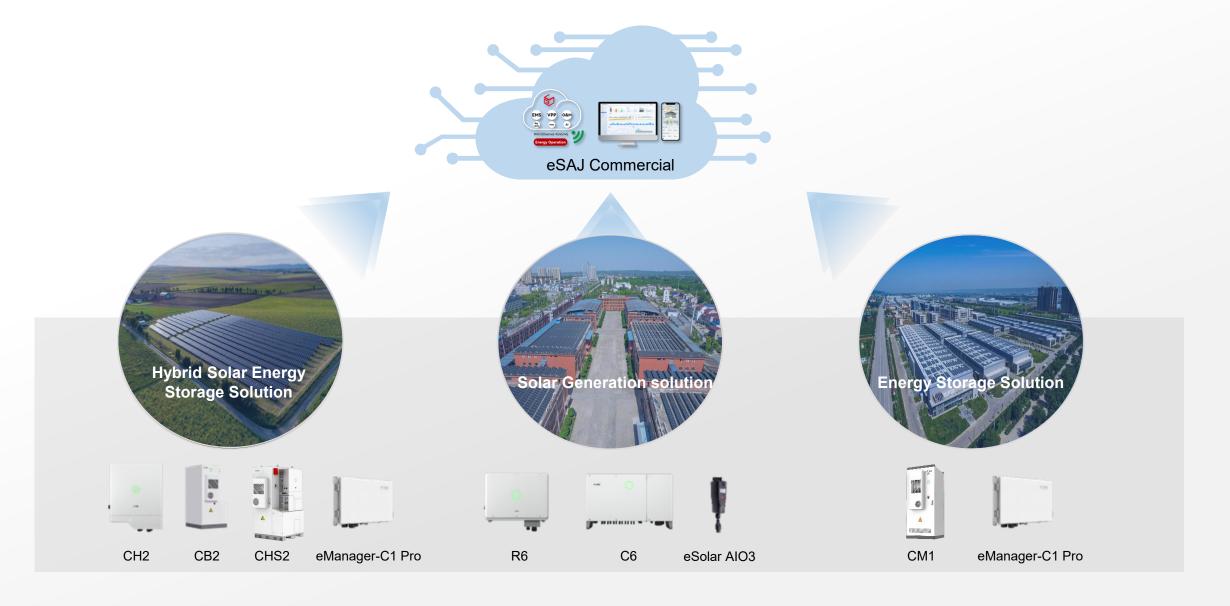

C&I Solar Generation solution



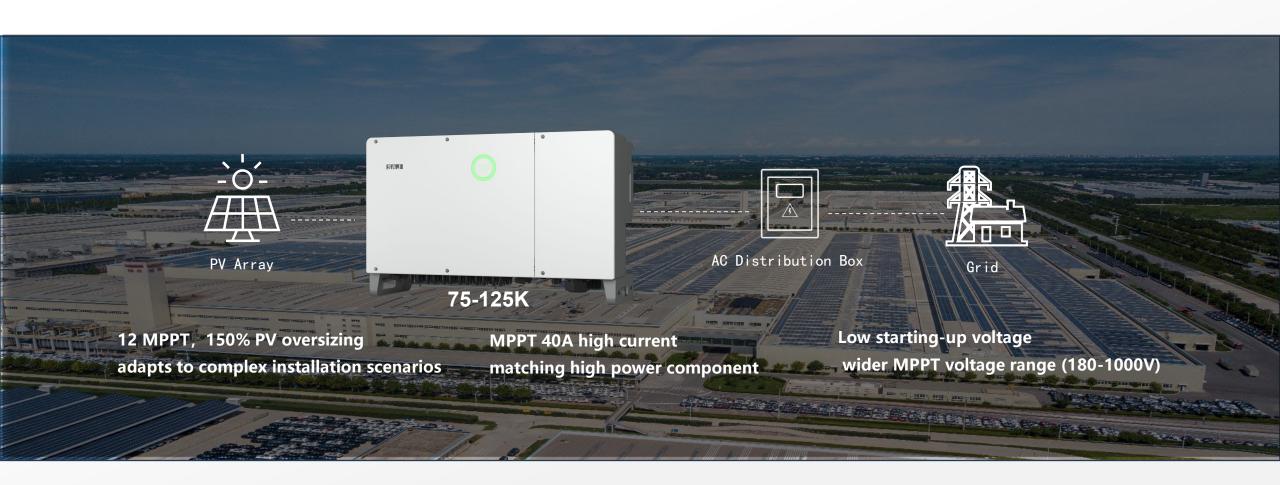

1.1-CHS2 Series Introduction









CH2-IP66 CH2-29.9~63K-T4/T5/T6

Currently available models for sale: CH2-50K-T6

CB2-IP55 CB2-57.3~100.3-HV5

Currently available models for sale: CB2-100.3-HV5

CHS2-29.9~63K-T4/T5/T6-X

CHS2-50K-T6-X X indicates the Battery Rated Capacity

Application Scenarios














- Excellent choice for small and medium-sized business and clients with energy consumption demand
- Easy to transport and install

1.2-CHS2 Solutions



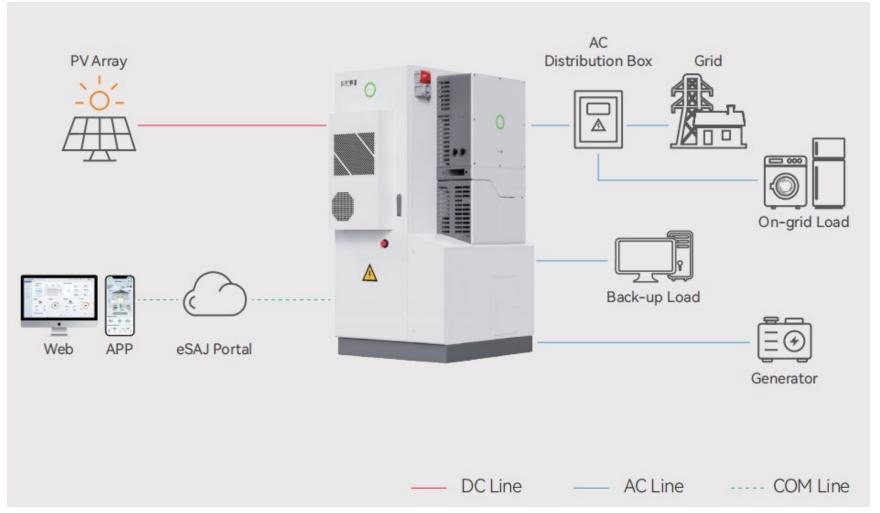


Main application scenarios:

- 1. Unstable grid areas
- 2. High electricity prices/Large peak-to-valley price difference areas
- 3. Off-grid scenarios
- 4. Subsidized policy

1.3-CHS2 Solutions: AC Coupling




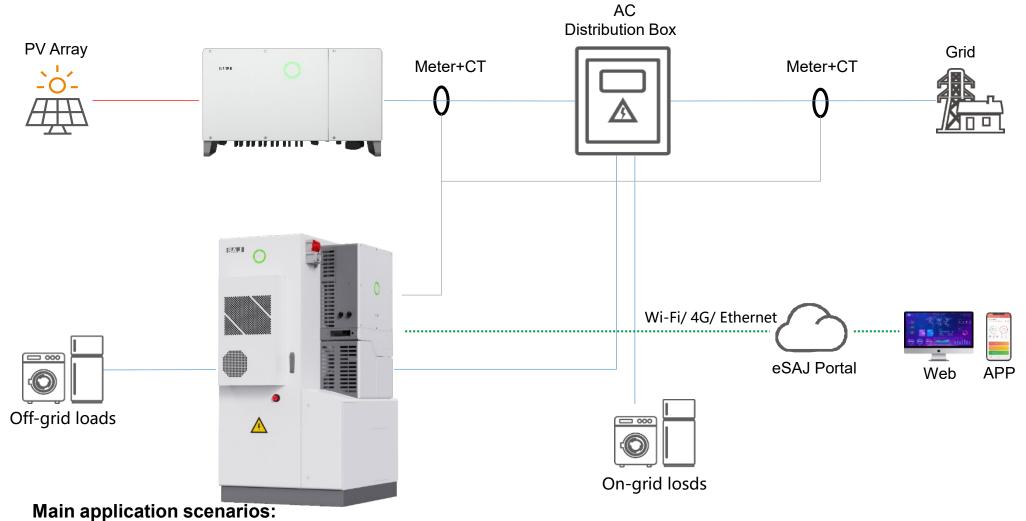

- 1. Energy storage renovation
- 2.Due to the site installation conditions are limited (such as DC cable is too long), PV and Energy storage need to be separate scenarios.
- 3. VPP Subsidized markets

1.4-CHS2 Solutions:On-Grid parallel



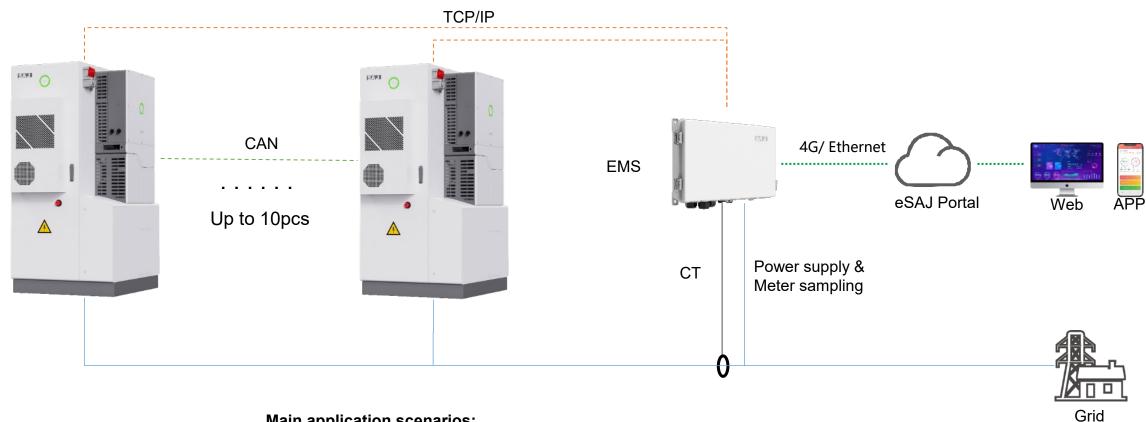


Main application scenarios:


- 1. Scenarios where the power grid is relatively stable
- 2. Users have high load power, such as factories, farms, commercial complexes, etc

1.5- Battery capacity expansion



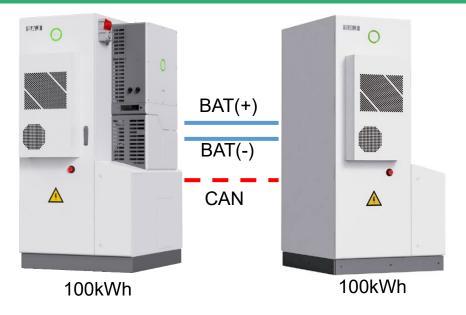

- 1. The power and communication cables between battery cabinets are not provided in the accessory kit;
- 2. The wiring terminals are configured by SAJ
- 3. A single CH2 supports up to 4 CB2 connections

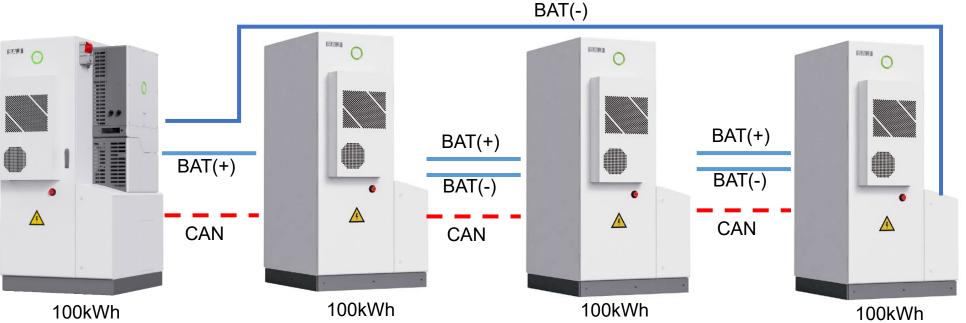

1.6- CHS2 Series Introduction





Sound and light alarms for firefighting



Emergency stop button



Temperature control system: Air conditioning



Air conditioning condensate water pipe



Display of status and capacity of the battery



Battery high-voltage control box

1.6- CHS2 Series Introduction






Smoke detector



Air conditioning cold air outlet



Aerosol, erupted at temperatures above 170 °C, extinguishing fires and preventing combustion

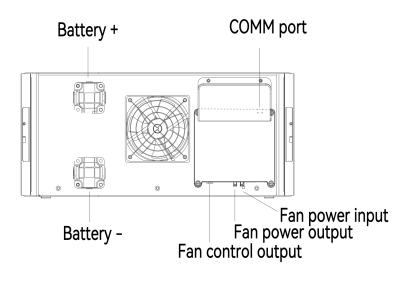

1.6- CHS2 Series Introduction





Communication adapter board



Temperature and humidity sensor



Water immersion sensor




Water immersion sensor

1.7- EMS

EMS Gateway: Intelligent Communication Box

Smart communication box




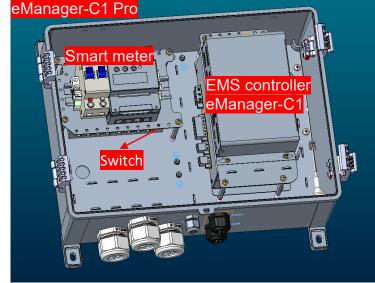




Product Features:

- Integrating EMS controller, ethernet switch, and smart meter
- Bluetooth/4G/Ethernet/RS485, Connection diversified
- Up to 10 inverters communication and monitoring
- Local near-end + remote/mobile all-weather monitoring, 7*24 real-time monitoring without restrictions
- Cloud-side collaboration to achieve remote Operation
- Support remote Web/APP access in various forms for power station maintenance, simplify operation and maintenance, and optimize operating costs
- Compact design,IP65 protection

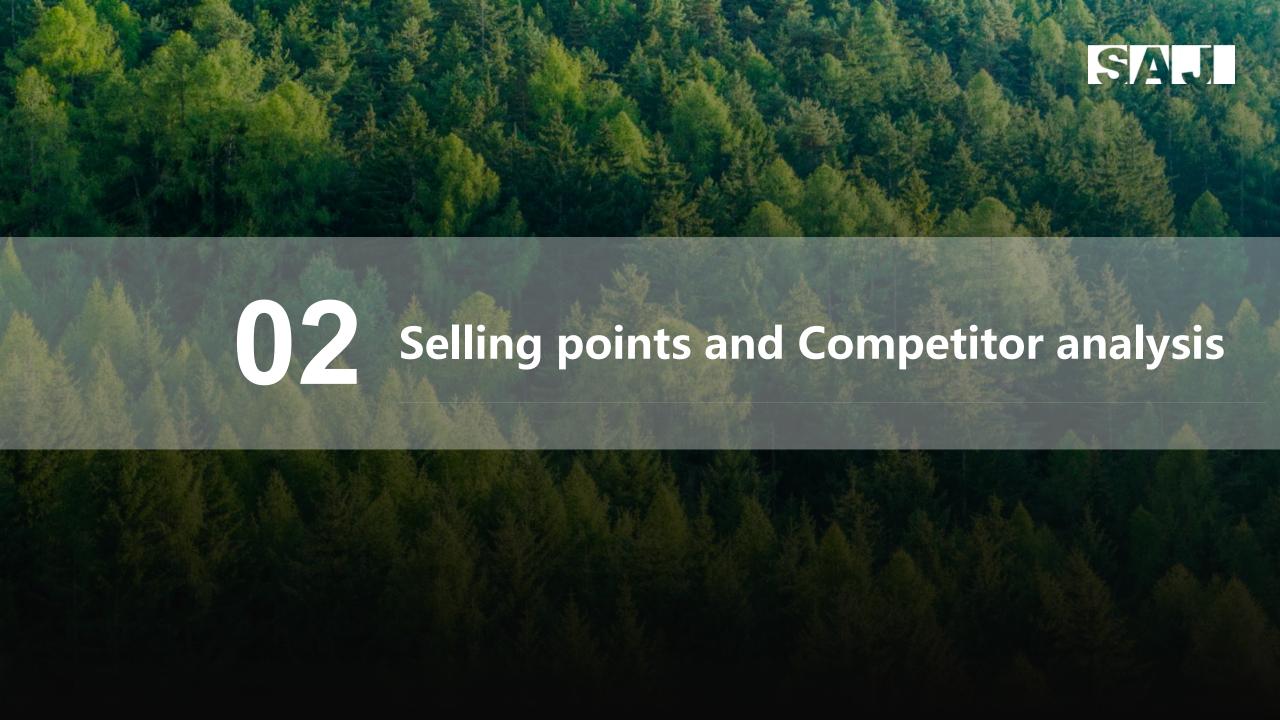

2.1-CH2-PV Input



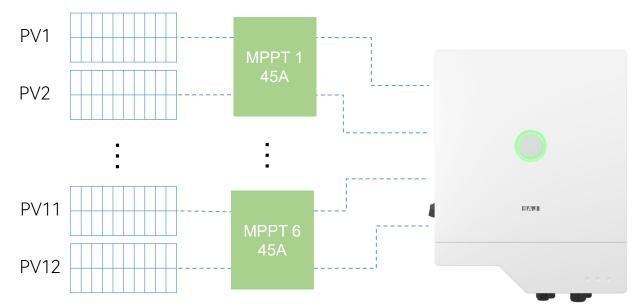


- Max 22.5A input current, match high power (210) PV panel.
- Up to 6MPPTs, 200% PV oversizing. When the PV power is supplied to the inverter for full power operation, the battery is also charged. Maximize energy utilization.

| Brand | Deye | Solis | KSTAR | SOLINTEG | AISWEI | ATESS | SAJ |
|----------------------------|------|-------|-------|----------|--------|-------|-------|
| MPPT Quantity | 4 | 4 | 3 | 4 | 6 | 3 | 6 |
| Maximum string current [A] | 18A | 20A | 18A | 15A | 18A | 20A | 22.5A |

2.2-CH2-200% PV oversizing



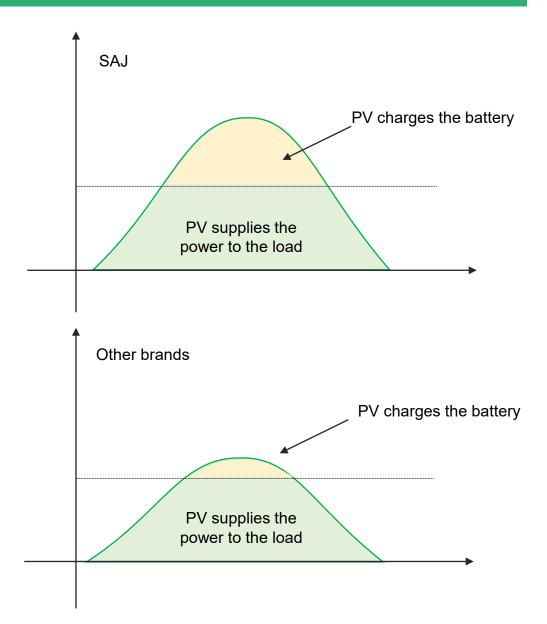

The Photovoltaic Storage System can store excess energy into the battery through the PV oversizing, providing power to the load in case of power outage or insufficient sunlight.

Slightly high of the initial investment in PV panels.

The optimal investment ratio depends on factors such as the project's geographical location, design details, and electricity costs.

Much More Energy Yield * in 10 years

ROI(Return on investment) Significantly improved

Maximize energy self consumption.

25% cost per kWh reduced


- *Simulated calculation parameters:
- 1. location is in Johannesburg, SA
- 2. Panel cost: 0.15\$/W
- 3. This calculation does not include efficiency attenuation, and the results are for reference only

2.3-CH2-25% LCOE reduce and 32% higher revenue




The initial investment of the SAJ solution is 14.25% more than that of the other solution.

The power generation in ten years can increase by **54%**, and LCOE (Levelized Cost of Energy) can be reduced by **25%** in ten years.

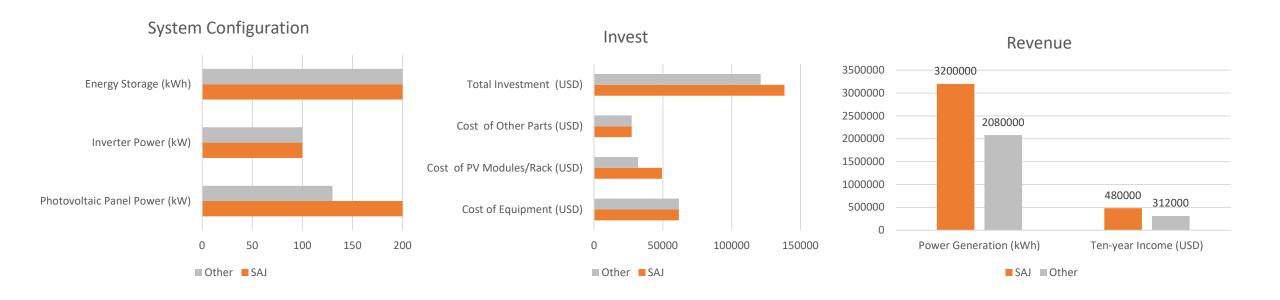

2.5-CH2-AFCI Standard configuration


The SAJ inverter comes standard with AFCI, making safety a basic configuration.

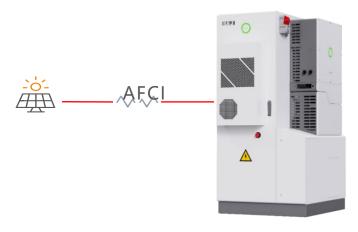

- An Standard configuration AFCI module adopts a high-precision current sensor to collect the string current.
- The frequency spectrum of the sampled current is analyzed through the dc arcing detection algorithm to accurately detect the arcing position, quickly turn off the inverter, and send an alarm.
- Minimize the damage of the power plant caused by dc arcing and improve its safety.
- Complies with UL 1699B-2018 standard and IEC63027 (Draft).



Other brands, such as Deye's AFCI, are optional function that require additional costs. The safety has not guaranteed.

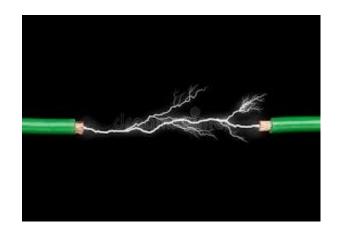



| Protection | |
|------------|--|
| | Anti-islanding Protection, PV String Input Reverse Polarity Protection, |
| Integrated | Insulation Resistor Detection, Residual Current Monitoring Unit, Output Over Current Protection, |
| | Output Shorted Protection, Surge Protection Arc Fault Circuit Interruption (AFCI optional) |

2.6-CH2-AC side Selling points



AC Overload capacity

AC Overload capacity is an important indicator of the inverter's output capability, with obvious advantages in off-grid scenarios.

| Brand | Deye | Solis | KSTAR | SOLINTEG | AISWEI | ATESS | SAJ |
|------------------------------|------|-------|-------|----------|--------|-------|------|
| Power | 50kW | 50kW | 50kW | 50kW | 50kW | 50kW | 50kW |
| Continuous overload capacity | 1.1 | 1.1 | 1.1 | 1.1 | 1.1 | 1.0 | 1.1 |
| Short time overload capacity | 1.5 | 1.5 | 1 | 1.2 | 1 | 1.2 | 1.5 |

AC Surge Protection

III General nominal discharge current 6KA,II General nominal discharge current10kA.

Three levels of Surge Protection: the inverter is at risk of short-circuiting when struck by a surge, usually without a feedback signal.

Two levels of Surge Protection: the inverter is open-circuit when struck by a surge and has a feedback signal.

| Brand | Deye | Solis | KSTAR | SOLINTEG | AISWEI | ATESS | SAJ |
|--------|------|-------|-------|----------|--------|-------|-----|
| AC SPD | III | II | Ш | 1 | 1 | II | П |

SAJ's inverter has a stronger surge protection capability.



2.7-CH2-Efficient intelligent temperature control system




4 °C temperature difference between battery cells

Operating Temperature Range: -30°C-50°C

The smaller the temperature difference between battery cells, the better the consistency of the battery system's long-term operation, the longer its lifespan, and the stronger its performance.

Cell temperature difference

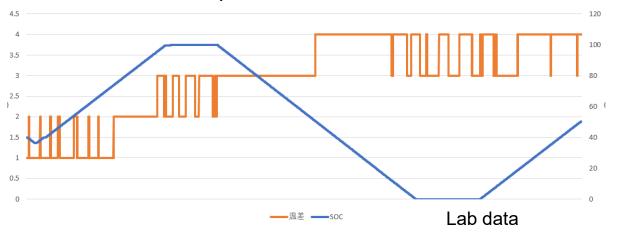


2.8-CB2-30% more cycles with 280Ah battery cells



280Ah High-performance batteries for long lifespan






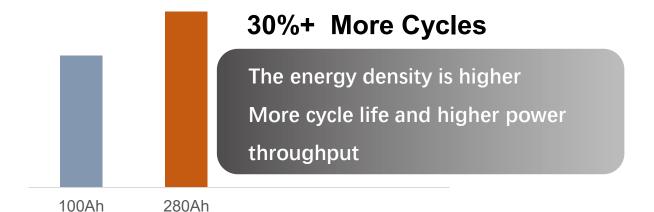

• 6000+ times cycle life

8000+ times cycle life

| | Max. Charging/ Discharging Current | Charging/ Discharging C-ratel |
|-------|---------------------------------------|----------------------------------|
| SAJ | 150A | 0.5C |
| Other | 100A | 0.35C |

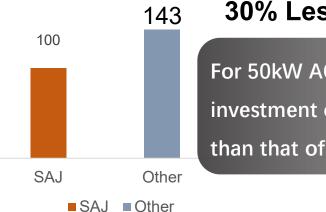


30% Less battery configuration


For 50kW AC output, The initial investment of the SAJ solution is lower than that of other solution

2.9-CB2-Battery System Selling points



6 levels of active/passive fire protection to ensure the safety of customer's property.

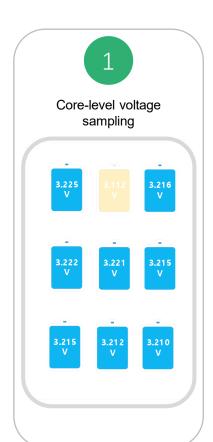

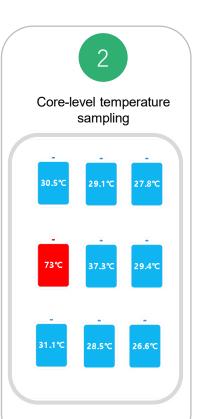









2.10-CHS2-Save 60% of installation time





Installation

Pre-wiring to all components, minimize installation labor costs.

Requirement Space

Compact structural design, flexible installation, and maximum utilization of on-site space.


System


Battery system DC coupling reduces conversion losses and improves efficiency.



3.1-External Interface-CH2-12V Power Output(RSD)



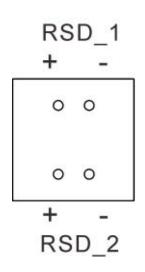

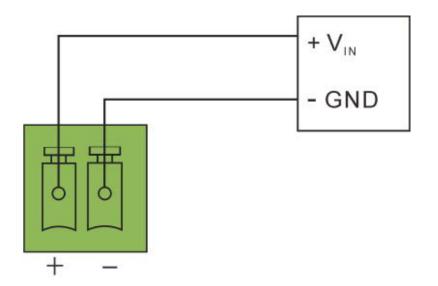


Note:

- 1、RSD_1, RSD_1 supplies power to the external photovoltaic fast shutdown module, and controls the power on and off by controlling the power of the module.
- 2. Reserve two 12V/1A interfaces.


3.2-External Interface-CH2-12V Power Output(RSD)



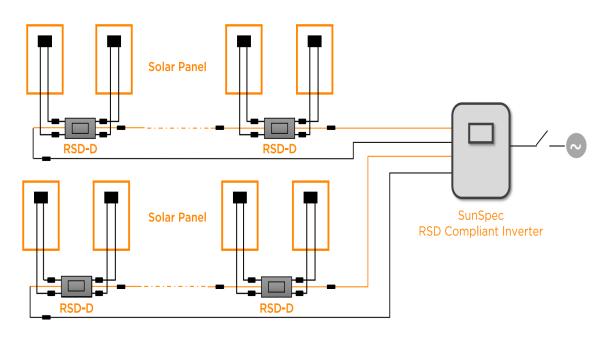

Note:

In SunSpec RSD Compliant Inverters system, only RSD Devices(RSD-S-PLC& RSD-D) are needed for the modules to realize mod-ule-level rapid shutdown function.

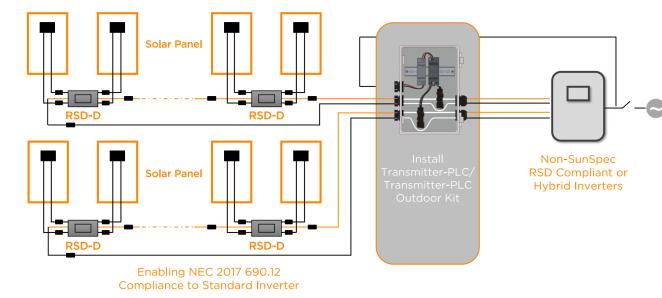



Note:

In Non SunSpec RSD Compliant & Hybrid Inverters system, a Transmitter device (Transmitter-PLC / Transmitter-PLC Outdoor Kit) needs to be installed together with RSD Devices (RSD-S-PLC& RSD-D) to realize module-level rapid shutdown function.

3.3-External Interface-CH2-Emergency Stop Dry Contact



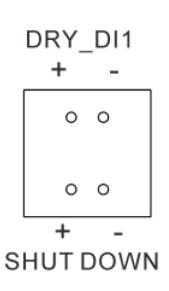

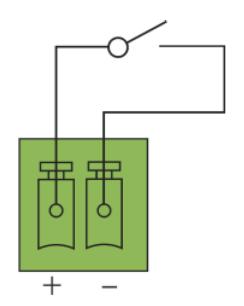


When + contact and - contact are shorted by external controlled switch, the inverter will stop immediately.


DRY_DI1: Reserved input dry contact.


3.4-External Interface-CH2-Generator control signal



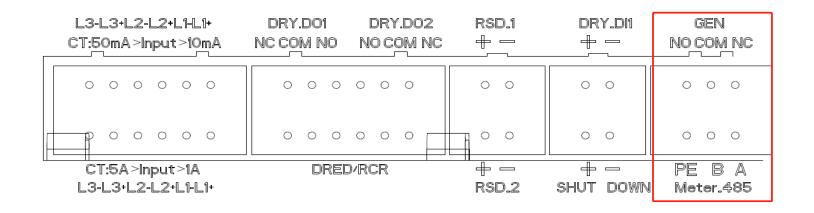


Generator start/stop interface to control the generator start and shutdown.

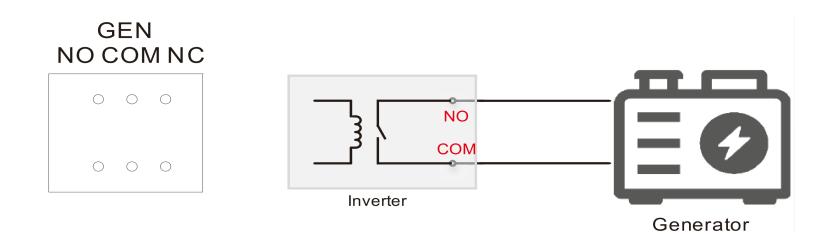

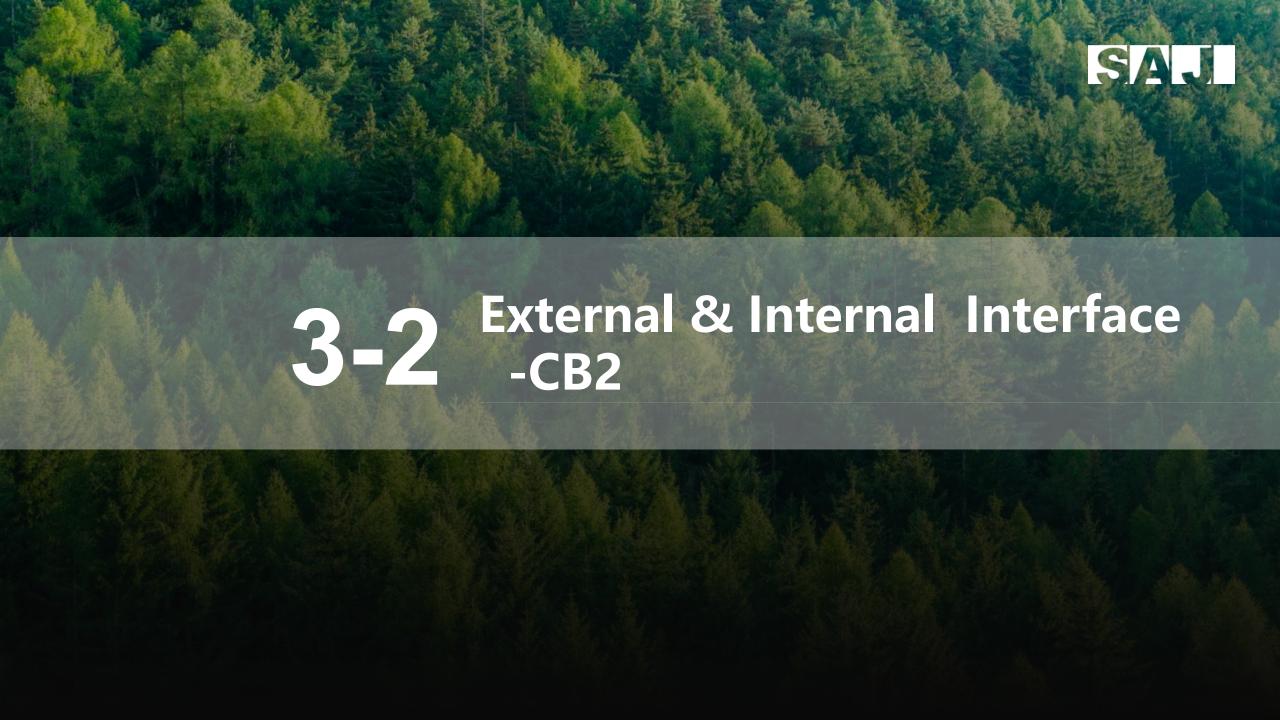

3.16-External Interface-CB2 (IP55) -Emergency stop button




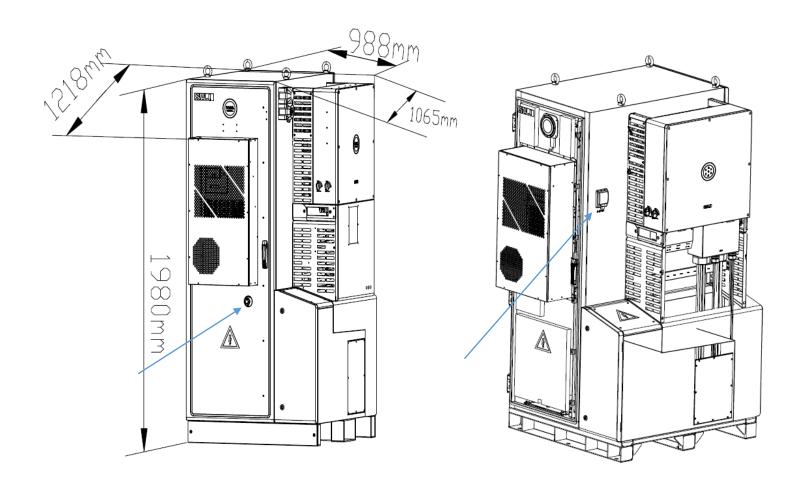

Emergency stop button: Both the inverter and battery will shut down.

3.17-External Interface-CB2(IP55)-High voltage control box



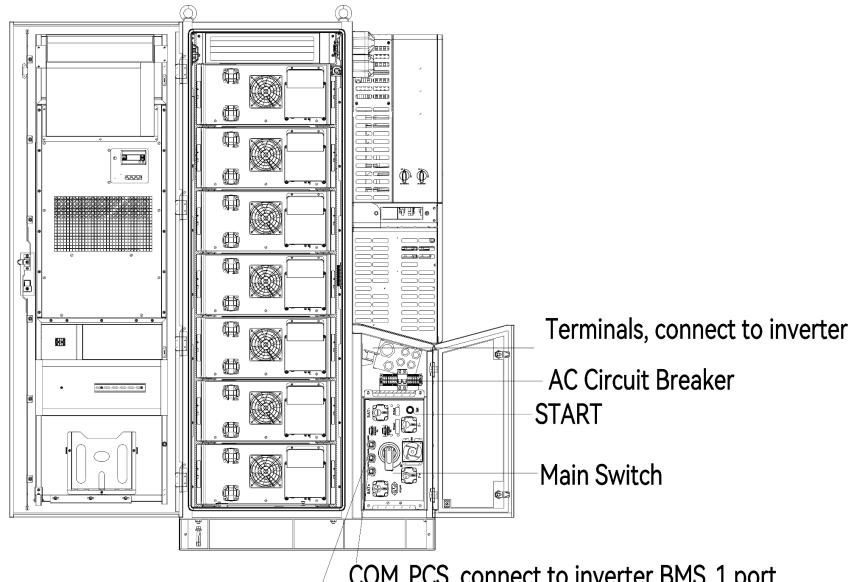

COM_PCS, connect to inverter BMS_1 port COM_PAR, to expand battery system

3.18-External Interface-CB2(IP55)-High voltage control box





High voltage control box:


- 1: AC input control switch (Power the air conditioner/AC-DC power supply)
- DC circuit breaker (manual opening/resetting of main circuit power supply);
- 3: Start/power-off contact button switch (Automatic reset, With green indicator light, start (light on) and stop (light off), Press the button for 4-5 seconds to take effect.)

Startup steps:

- 1. Connect the system and enable the 1(AC input control switch).
- 2.Rotate the 2(DC circuit breaker) to ON.
- 3. Press the 3(contact button switch), press the button for 2-3 seconds to start.
- 4.BMS automatically powers on and detects program operation.
- 5. The system will start running after detecting no faults.

Shutdown steps:

- 1. Press the 3(contact button switch) until the switch light goes out.
- 2.Rotate the 2(DC circuit breaker) to OFF.
- 3. Turn off the 1(AC input control switch).
- 4. After completing the above steps, the entire machine will stop running.

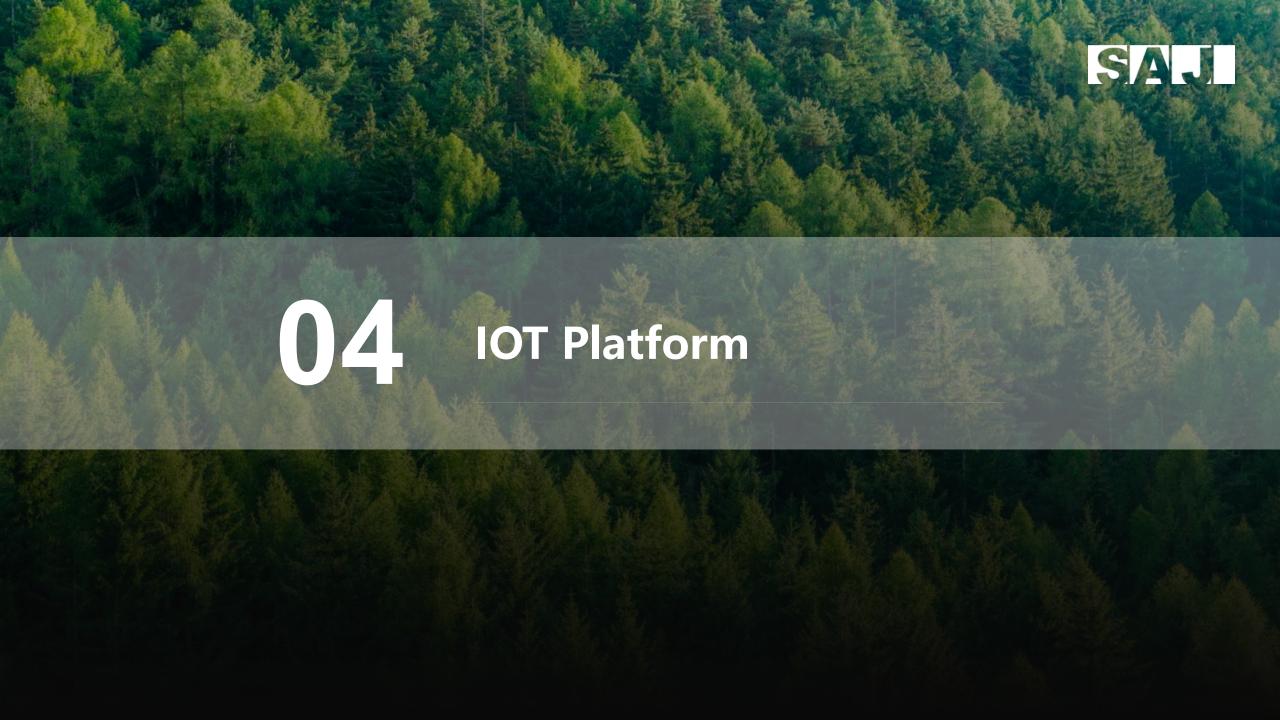

RealTime Monitoring-WEB




Plants Devices


Alarms

Environment

Consumption

Other Data

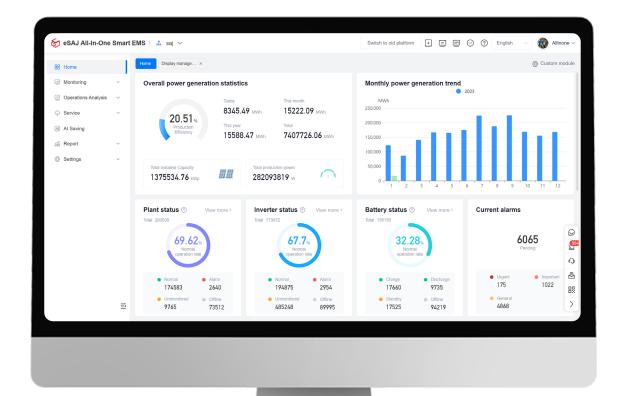


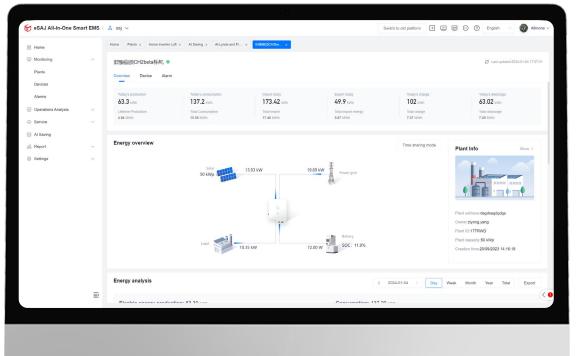






All-round Management of Multiple Plants - Plants, Inverters, Batteries

Plants Devices Alarms Environment Consumption Other Data

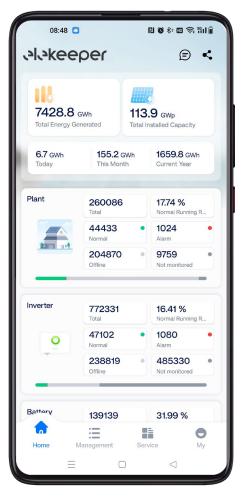

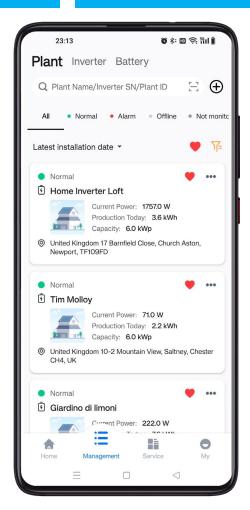

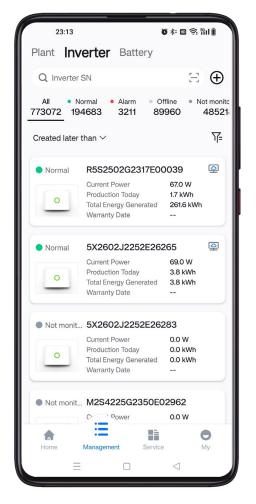

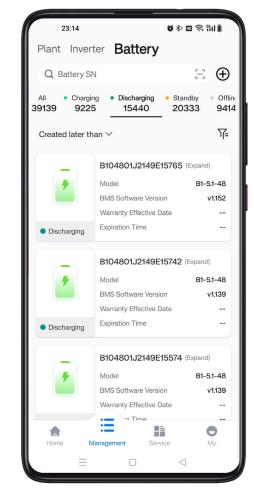

Overview

Plant Management

Inverter management


Battery management



All-round Management of Multiple Plants - Plants, Inverters, Batteries

Plants Devices Alarms Environment Consumption Other Data



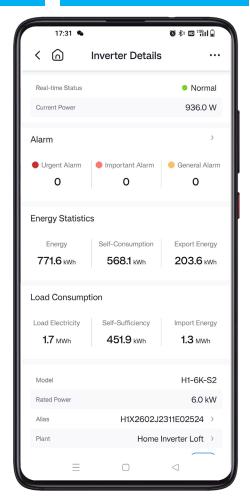






Home Device Battery Analysis

Energy Efficiency Management

Energy Statistics


YoY Analysis



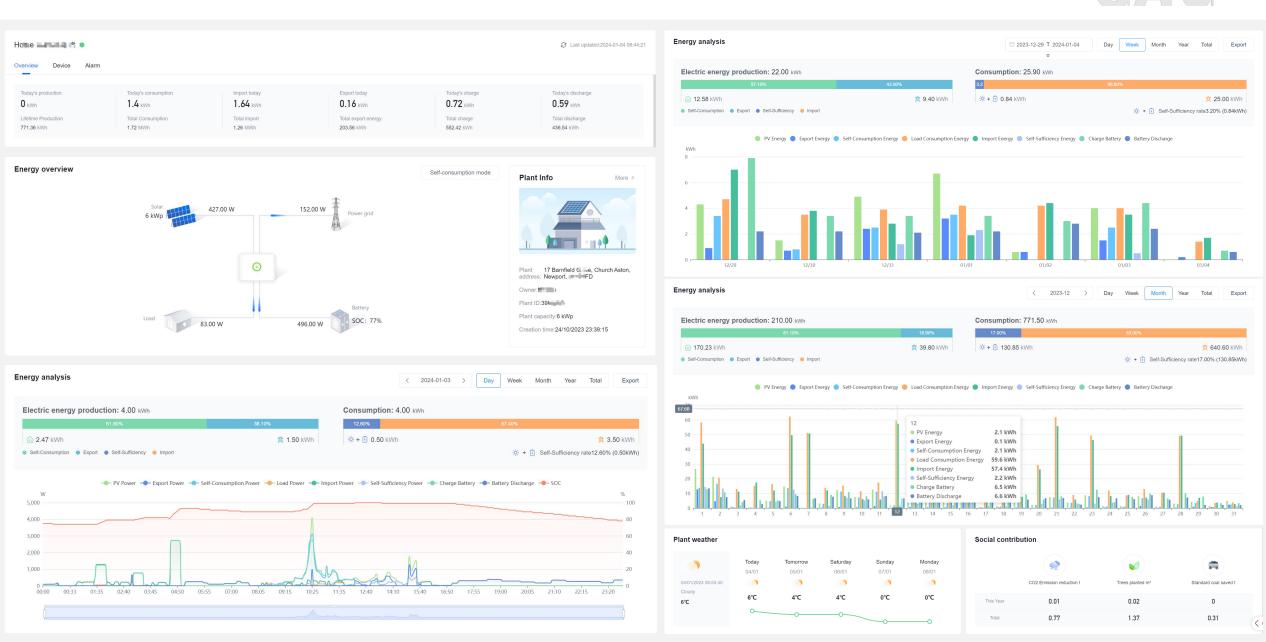


Energy Revenues and Cost Management



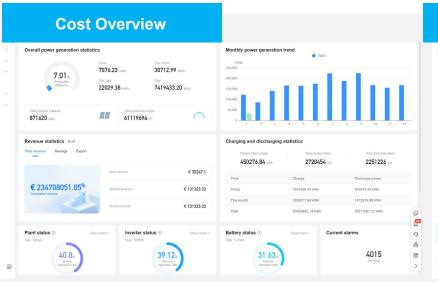






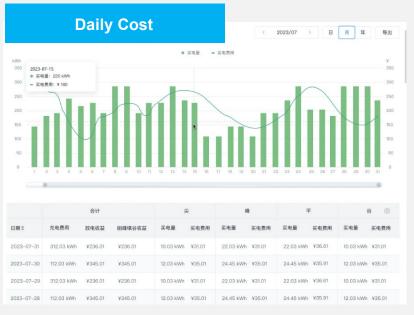





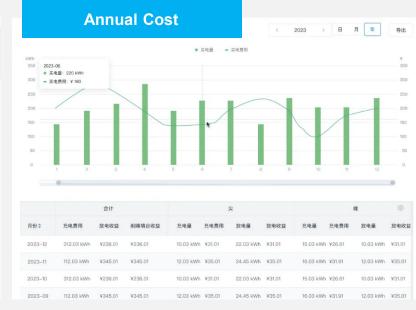

Alarm Management



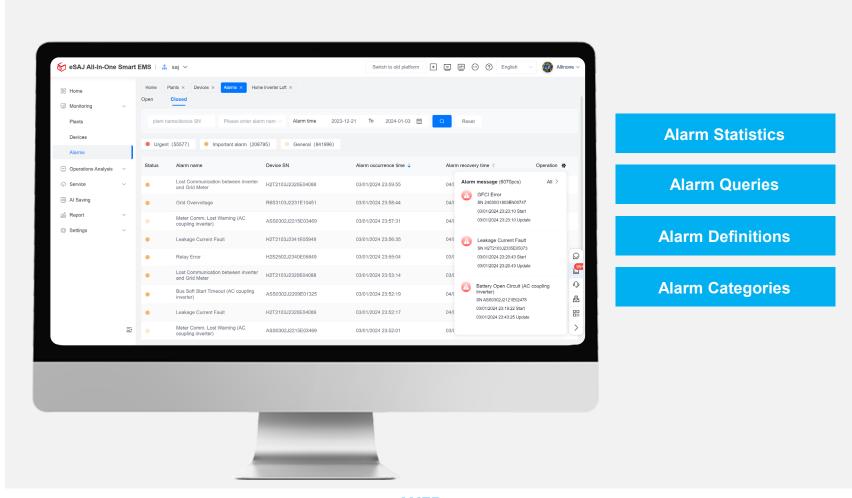

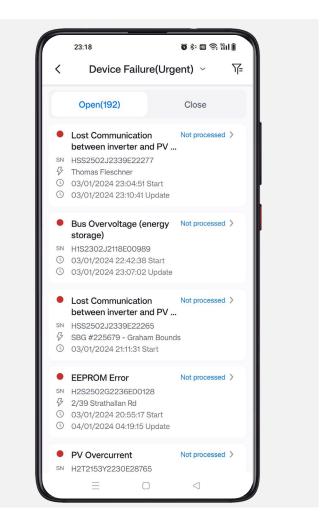



WEB

APP

eSAJ's Continuous Innovation



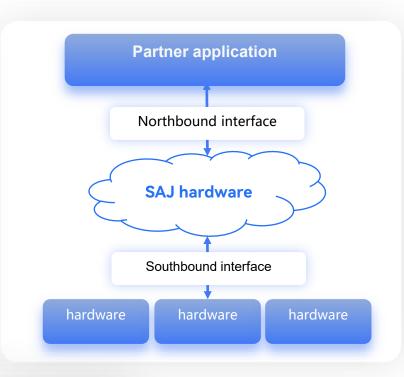

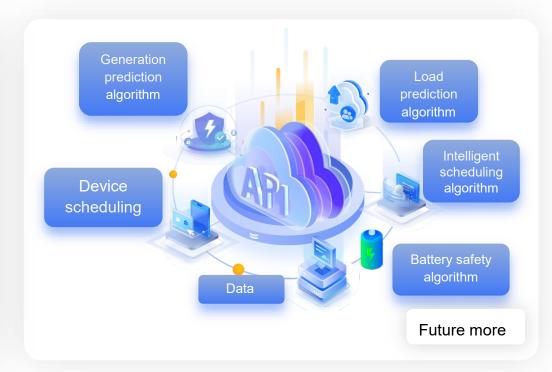


Third-party energy operators:

It provides access and control interfaces for energy devices. Energy operators, developers can obtain the ability to interact with energy devices to achieve energy operation scenarios.


Brand partner:

Provide the interface of eSAJ Home smart energy management system and other business systems, partners as developers can obtain the ability to interact with the business system, and realize their own more business.

Participate the Energy Trading and VPP Project, Earning Profit for both Sides

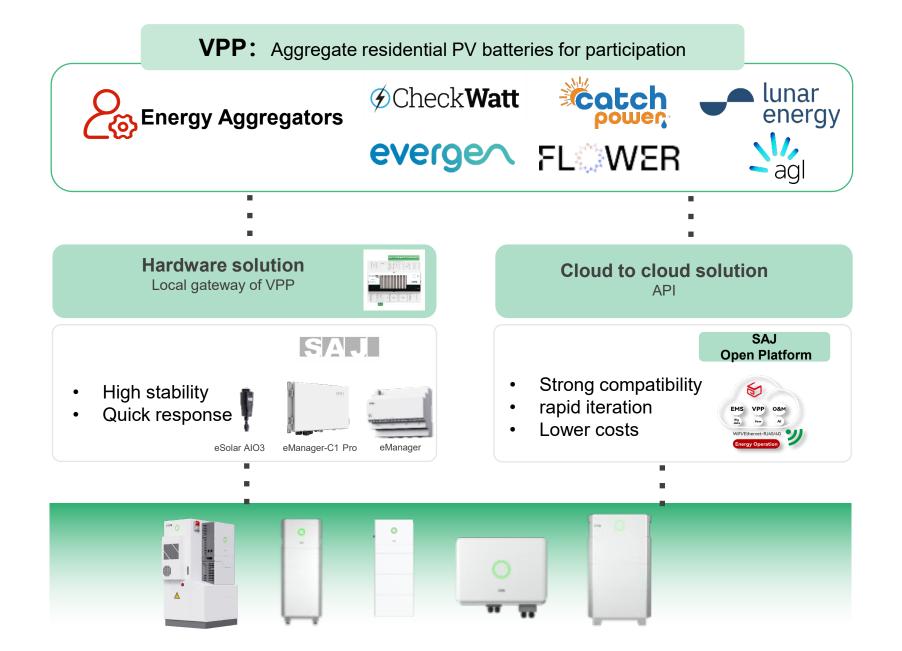

12 Successful VPP Case

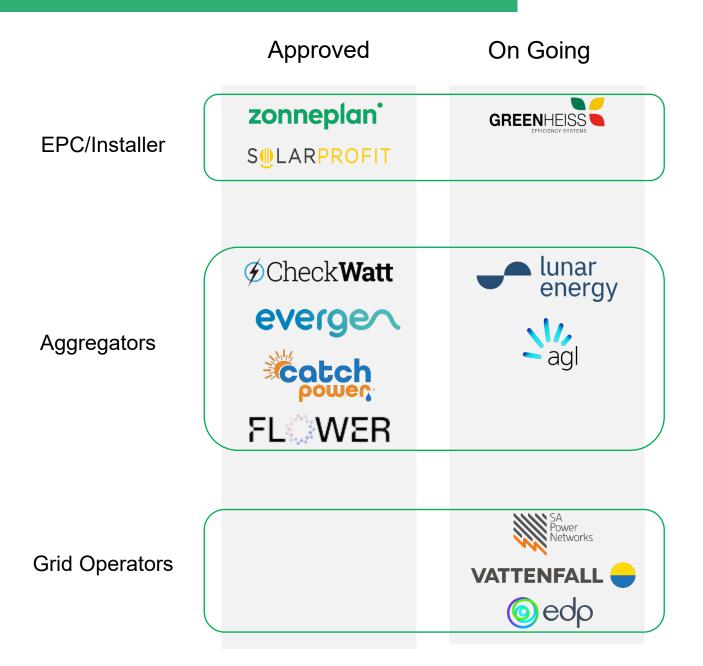


01 Countries&Areas

Germany, Sweden, Finland, Norway, Spain, Portugal, Australia

02 Peak load shifting



03 Frequency regulation

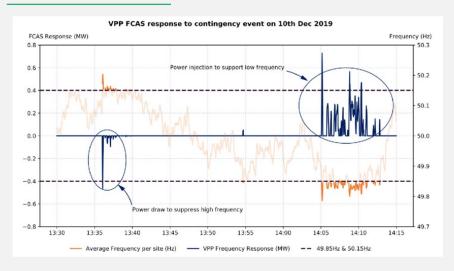



THANKYOU

Revolutionize Energy Storage Solutions

Guangzhou Sanjing Electric Co., Ltd.

Add: SAJ Innovation Park, No.9, Lizhishan Road, Science City, Guangzhou High-tech Zone, Guangdong, China. E-mail: marketing.drive@saj-electric.com Tel: +86 400-960-0112 Fax: +86 020-66608589 Web: www.saj-electric.com